



LEEDS  
BECKETT  
UNIVERSITY

---

Citation:

Sun, M and Liao, F and Deng, J (2021) Design of an optimal preview controller for linear discrete-time periodic systems. Transactions of the Institute of Measurement and Control, 43 (12). pp. 2637-2646. ISSN 0142-3312 DOI: <https://doi.org/10.1177/01423312211002585>

Link to Leeds Beckett Repository record:

<https://eprints.leedsbeckett.ac.uk/id/eprint/8122/>

Document Version:

Article (Accepted Version)

---

Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

The final version of this paper has been published in Transactions of the Institute of Measurement and Control, 43/12, 2021 by SAGE Publications Ltd, All rights reserved. © Mengyuan Sun, Fucheng Liao, Jiamei Deng, 2021. It is available at: SAGE Journals <https://journals.sagepub.com/doi/10.1177/01423312211002585>

The aim of the Leeds Beckett Repository is to provide open access to our research, as required by funder policies and permitted by publishers and copyright law.

The Leeds Beckett repository holds a wide range of publications, each of which has been checked for copyright and the relevant embargo period has been applied by the Research Services team.

We operate on a standard take-down policy. If you are the author or publisher of an output and you would like it removed from the repository, please [contact us](#) and we will investigate on a case-by-case basis.

Each thesis in the repository has been cleared where necessary by the author for third party copyright. If you would like a thesis to be removed from the repository or believe there is an issue with copyright, please contact us on [openaccess@leedsbeckett.ac.uk](mailto:openaccess@leedsbeckett.ac.uk) and we will investigate on a case-by-case basis.

# Design of an Optimal Preview Controller for Linear Discrete-Time Periodic Systems

Mengyuan Sun<sup>1,2</sup> Fucheng Liao<sup>1</sup> Jiamei Deng<sup>3</sup>

<sup>1</sup>School of Mathematics and Physics, University of Science and Technology Beijing,  
Beijing 100083, China

<sup>2</sup>Shandong Yantai Nursing School,  
Yantai 264000, China

<sup>3</sup>School of Built Environment, Engineering and Computing, Leeds Beckett University,  
Leeds LS6 3QS, United Kingdom

Corresponding author:

Fucheng Liao, School of Mathematics and Physics, University of Science  
and Technology Beijing, No. 30, Xueyuan Road, Haidian District, Beijing  
100083, China.

Email: fc\_liao@ustb.edu.cn

**Abstract:** In this paper, the preview tracking control problem for linear discrete-time periodic systems is considered. Firstly, to overcome the difficulty arising from periodicity of the system, the linear discrete-time periodic system is transformed into an ordinary time-invariant system by lifting method. Secondly, the difference between a system state and its steady-state value is used to derive an augmented system instead of the usual difference between system states. Then, the preview controller for the augmented system is proposed by the preview control theory, which solves the preview tracking control problem for the periodic systems. Moreover, an integrator is introduced to ensure that the output can track the reference signal without static error. Finally, the obtained results are illustrated by **the simulation examples**.

**Key word:** preview control; periodic system; lifting method; Riccati equation; augmented system

## 1. Introduction

A linear discrete-time periodic system is a special kind of time-varying systems, which plays a very important role in both theory and practice. Due to the significance of the linear discrete-time periodic systems, in recent years, a growing interest has been attracted on the control of periodic systems. Lv and Zhang (2016) discussed the periodic Luenberger-type observers design problem for linear discrete-time periodic systems. Lovera *et al.* (2002) considered the attitude stabilization and disturbance moment attenuation of small satellites with magnetic actuators and proposed a solution to the problem in terms of optimal periodic control (Lovera *et al.*, 2002). Arcara *et al.* (2000) represented an optimal periodic design method of control systems to reduce vibration of the helicopter main rotor (Arcara *et al.*, 2000). A calculation method is proposed in Varga (2004) to design fault detection filters for periodic systems. So far, with regard to the discrete-time periodic systems, the research activities have been extensively used in hard disk drive servo systems, wind turbines and automobile engines (Allen *et al.*, 2011; Pipeleers *et al.*, 2010). In addition, the discrete-time periodic systems have been widely employed to various fields such as aerial systems, communication systems, image compression systems and voice processing (Lv, 2017). However, seldom attention devoted to the preview control of linear discrete-time periodic systems, for which there still are considerable gaps in literatures.

Preview control is a control technique which improves the tracking performance of a system via utilizing the known future information of the reference signals and disturbance signals (Birla *et al.*, 2015; Zhang, 2000). Since Sheridan (1966) first proposed the concept of preview control, the scientific community began a journey to explore it. Recently, preview control has been discussed deeply for generalized systems, stochastic systems and multi-agent systems (Liao *et al.*, 2012; Gershon *et al.*, 2014; Liao *et al.*, 2016). At the same time, the preview control has attracted significant interest in the applied fields, such as automobile active suspension devices (Gohrle *et al.*, 2014; Li *et al.*, 2014), electromechanical valves (Negm *et al.*, 2006; Mianzo *et al.*, 2007) and automobile driving (Chen *et al.*, 2012). Shimmyo *et al.* (2013) studied the application of preview control in the biped walking robots and used

the preview control to generate the walking patterns of the biped walking robots. Li *et al.* (2001) has combined a general optimal servo system with preview feed-forward compensation and applied the optimal preview servo system to the design of terrain tracking controller for cruise missiles (Li *et al.*, 2001). In Zhang *et al.* (1996), by using the area errors as the evaluation function of preview control method, an effective method of high-precision path control was proposed to improve the control effects of robots. Ozdemir *et al.* (2013) revealed the application of preview control in wind turbine and demonstrated the benefits of preview wind measurements for turbine control problems. However, to the best of authors' knowledge, most of the existing results are developed for the linear discrete-time systems, whereas very few results have concentrated on periodic systems. Therefore, it is of great necessity to investigate the preview control for periodic systems.

Motivated by the above statements, the design of an optimal preview controller for periodic systems becomes an important topic. This paper investigates the linear discrete-time periodic systems and presents a new design method of optimal preview controller for such a system. Compared with Liao *et al.* (2019), the system in this paper is more general, in which state matrix, input matrix and output matrix are periodic. Firstly, using the lifting procedure in Liao *et al.* (2019), the original system is converted into a time-invariant system. Then, the difference between a state vector and its steady-state value is used to construct the augmented system, which is a different approach to the traditional one. Thus, the preview tracking problem is reduced to an optimal regulation problem. An integrator is introduced to the closed-loop system, which guarantees that the output of the system tracks the reference signal without static error. Finally, a preview controller is designed for the system to improve the quality of the closed-loop system.

The main contributions of this paper can be listed as follows: (1) The system considered in this paper is more general, which contains the periodic system in Liao *et al.* (2019). To be specific, the coefficient matrices of the system in this study are all periodic, which is an extension of the previous studies. (2) Instead of the usual difference method, a new approach is adopted to derive the augmented error system.

(3) A new design technique of preview controller for linear discrete-time periodic systems has been suggested to improve the tracking performance of the system. (4) Two simulation examples are given to illustrate the effectiveness and advantages of the proposed method. Compared with the previous work, such as in Liao *et al.* (2019), the control performance of the proposed method is better than that of the existing method.

## 2. Problem Formulation

Consider a linear discrete-time system

$$\begin{cases} x(k+1) = A(k)x(k) + B(k)u(k) \\ y(k) = C(k)x(k) \end{cases}, \quad (1)$$

where  $x(k) \in R^n, u(k) \in R^r, y(k) \in R^m$  represent the state vector, input vector, and the output vector, respectively.  $A(k) \in R^{n \times n}, B(k) \in R^{n \times r}, C(k) \in R^{m \times n}$  represent the coefficient matrices of the system. Supposing all coefficient matrices  $A(k), B(k), C(k)$  take  $p$  as a period, namely,

$$A(k+p) = A(k), B(k+p) = B(k), C(k+p) = C(k).$$

Because of this characteristic, System (1) is called a periodic system.

Denote  $A_s = A(k)$ ,  $B_s = B(k)$ ,  $C_s = C(k)$ , where  $s \equiv k \pmod{p}$

( $s = 0, 1, 2, \dots, p-1$ ). Construct the matrices

$$\bar{A} = \begin{bmatrix} 0 & 0 & \cdots & 0 & A_0 \\ 0 & 0 & \cdots & 0 & A_1 A_0 \\ 0 & 0 & \cdots & 0 & A_2 A_1 A_0 \\ \vdots & \vdots & & \vdots & \vdots \\ 0 & 0 & \cdots & 0 & A_{p-1} A_{p-2} \cdots A_0 \end{bmatrix},$$

$$\bar{B} = \begin{bmatrix} B_0 & 0 & 0 & \cdots & 0 \\ A_1 B_0 & B_1 & 0 & \cdots & 0 \\ A_2 A_1 B_0 & A_2 B_1 & B_2 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ A_{p-1} A_{p-2} \cdots A_1 B_0 & A_{p-1} A_{p-2} \cdots A_2 B_1 & A_{p-1} A_{p-2} \cdots A_3 B_2 & \cdots & B_{p-1} \end{bmatrix},$$

$$\bar{C} = \text{diag}(C_0, C_1, C_2, \dots, C_{p-1}),$$

$\underbrace{\hspace{10em}}_{p \uparrow}$

where  $\bar{A}$ ,  $\bar{B}$ ,  $\bar{C}$  are constant matrices of dimensions  $(pn) \times (pn)$ ,  $(pn) \times (pr)$ ,  $(pm) \times (pn)$ , respectively.

The following assumptions have been made for the system:

**A1**  $(\bar{A}, \bar{B})$  is stabilizable and  $(\bar{C}, \bar{A})$  is detectable.

**A2**  $\begin{bmatrix} \bar{A} - I & \bar{B} \\ \bar{C} & 0 \end{bmatrix}$  has full row rank.

**A3** Reference signal  $R(k)$  is previewable in the future  $M_R$  period, namely that the future value  $R(k)$  is available in  $pM_R$  step. **In other words**,  $R(k), R(k+1), R(k+2), \dots, R(k+pM_R)$  are available. Additionally, the reference signal satisfies

$$R(k+j) = r, j \geq pM_R + 1$$

and

$$\lim_{k \rightarrow \infty} R(k) = r,$$

where  $r$  is a constant vector.

Define **the** error signal as

$$e(k) = y(k) - R(k).$$

The purpose of this paper is to design a controller with preview compensation for System (1) such that

$$\lim_{k \rightarrow \infty} e(k) = \lim_{k \rightarrow \infty} [y(k) - R(k)] = 0.$$

### 3. The Lifting of Periodic Systems

Firstly, fully consider the periodicity of system coefficient matrices, transform the problem into that of time-invariant systems through the lifting method. For any  $k, k = pi, pi+1, \dots, pi+(p-1)$ , substituting in System (1), the following formula (2) can be obtained



the reference signal  $\bar{R}(i)$  asymptotically, or the error  $\bar{e}(i)$  is asymptotically stable to a zero vector.

Then, the usual method in preview theory can be utilized to convert the tracking problem into an adjustment problem by constructing the augmented system. Later, the controller is obtained through the optimal control method.

In fact, if the output of (3) tracks the reference signal asymptotically, there always exist vector  $\bar{x}(\infty), \bar{u}(\infty)$  such that

$$\begin{cases} \bar{x}(\infty) = \bar{A}\bar{x}(\infty) + \bar{B}\bar{u}(\infty) \\ \bar{R} = \bar{C}\bar{x}(\infty) \end{cases} . \quad (4)$$

Namely,

$$\begin{bmatrix} \bar{A} - I & \bar{B} \\ \bar{C} & 0 \end{bmatrix} \begin{bmatrix} \bar{x}(\infty) \\ \bar{u}(\infty) \end{bmatrix} = \begin{bmatrix} 0 \\ I \end{bmatrix} \bar{R} , \quad (5)$$

where  $\bar{R}$  represents the steady-state value of  $\bar{R}(i)$  at infinity, that is,

$$\bar{R} = [r^T \quad r^T \quad \dots \quad r^T]^T .$$

Thus, under the assumption A2,  $\bar{x}(\infty)$  and  $\bar{u}(\infty)$  in Equation (5) exist.

Define

$$\tilde{x}(i) = \bar{x}(i) - \bar{x}(\infty), \quad \tilde{u}(i) = \bar{u}(i) - \bar{u}(\infty), \quad \tilde{y}(i) = \bar{y}(i) - \bar{y}(\infty), \quad \tilde{R}(i) = \bar{R}(i) - \bar{R}$$

Subtract both sides of Equation (4) using Equation (3). Then, the following is obtained:

$$\begin{cases} \bar{x}(i+1) - \bar{x}(\infty) = \bar{A}(\bar{x}(i) - \bar{x}(\infty)) + \bar{B}(\bar{u}(i) - \bar{u}(\infty)) \\ \bar{y}(i) - \bar{y}(\infty) = \bar{C}(\bar{x}(i) - \bar{x}(\infty)) \end{cases} .$$

That is

$$\begin{cases} \tilde{x}(i+1) = \bar{A}\tilde{x}(i) + \bar{B}\tilde{u}(i) \\ \tilde{y}(i) = \bar{C}\tilde{x}(i) \end{cases} \quad (6)$$

Equally, based on the definition of error vector, (7) can be obtained:

$$\bar{e}(i) = \bar{y}(i) - \bar{R}(i) = \bar{C}(\bar{x}(i) - \bar{x}(\infty)) - (\bar{R}(i) - \bar{R}) = \tilde{y}(i) - \tilde{R}(i) . \quad (7)$$



In order to design a satisfied controller, the quadratic performance index for (6) is introduced

$$J = \sum_{i=1}^{\infty} \left[ \bar{e}^T(i) \bar{Q} \bar{e}(i) + \tilde{u}^T(i) \bar{H} \tilde{u}(i) \right], \quad (8)$$

where  $\bar{Q} > 0, \bar{H} > 0$ . Therefore, the original tracking problem is reduced to a preview control problem of (6). The quadratic performance index is given in (8). The previewable reference signal is defined by  $\bar{R}(i)$ , where  $M_R$  is the preview length, that is, at the current time  $i$ , the current value and the  $M_R$  step future value of the reference signal  $\bar{R}(i)$  are available.

#### 4. Construction of Augmented System

Substituting the state equation of (6) into (7) gives

$$\bar{e}(i+1) = \bar{C}\bar{A}\tilde{x}(i) + \bar{C}\bar{B}\tilde{u}(i) - \tilde{R}(i+1). \quad (9)$$

By utilizing the method in Liao et al. (2003), the following augmented system are obtained by combining (6) and (9) together,

$$\begin{cases} X_0(i+1) = \tilde{A}_0 X_0(i) + \tilde{B}_0 \tilde{u}(i) + \tilde{G}_{R0} \tilde{R}(i+1) \\ \bar{e}(i) = \tilde{C}_0 X_0(i) \end{cases}, \quad (10)$$

where

$$X_0(i) = \begin{bmatrix} \bar{e}(i) \\ \tilde{x}(i) \end{bmatrix},$$

$$\tilde{A}_0 = \begin{bmatrix} 0 & \bar{C}\bar{A} \\ 0 & \bar{A} \end{bmatrix} = \left[ \begin{array}{cccc|cccc} 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & CA_0 \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & CA_1 A_0 \\ \vdots & \vdots & \ddots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & CA_{p-2} \cdots A_0 \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & CA_{p-1} A_{p-2} \cdots A_0 \\ \hline 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & A_0 \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & A_1 A_0 \\ \vdots & \vdots & \ddots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & A_{p-2} \cdots A_0 \\ 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & A_{p-1} A_{p-2} \cdots A_0 \end{array} \right] \in R^{(pm+pn) \times (pm+pn)},$$

$$\tilde{B}_0 = \begin{bmatrix} \overline{CB} \\ \overline{B} \end{bmatrix} = \begin{bmatrix} CB_0 & 0 & 0 & \cdots & 0 \\ CA_1B_0 & CB_1 & 0 & \cdots & 0 \\ CA_2A_1B_0 & CA_2B_1 & CB_2 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ CA_{p-1}A_{p-2}\cdots A_1B_0 & CA_{p-1}A_{p-2}\cdots A_2B_1 & CA_{p-1}A_{p-2}\cdots A_3B_2 & \cdots & CB_{p-1} \\ \hline B_0 & 0 & 0 & \cdots & 0 \\ A_1B_0 & B_1 & 0 & \cdots & 0 \\ A_2A_1B_0 & A_2B_1 & B_2 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ A_{p-1}A_{p-2}\cdots A_1B_0 & A_{p-1}A_{p-2}\cdots A_2B_1 & A_{p-1}A_{p-2}\cdots A_3B_2 & \cdots & B_{p-1} \end{bmatrix} \in \mathbf{R}^{(pm+pn) \times (pr)}$$

$$\tilde{C}_0 = \begin{bmatrix} I_{pm} & 0_{(pm) \times (pn)} \end{bmatrix} = \begin{bmatrix} I_m & 0 & \cdots & 0 & \vdots & 0 & 0 & \cdots & 0 \\ 0 & I_m & \cdots & 0 & \vdots & 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & I_m & \vdots & 0 & 0 & \cdots & 0 \end{bmatrix} \in \mathbf{R}^{(pm) \times (pm+pn)},$$

$$\tilde{G}_{R0} = \begin{bmatrix} -I_{pm} \\ 0_{(pn) \times (pm)} \end{bmatrix} = \begin{bmatrix} -I_m & 0 & \cdots & 0 \\ 0 & -I_m & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & -I_m \\ \hline 0 & 0 & \cdots & 0 \\ 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & 0 \end{bmatrix} \in \mathbf{R}^{(pm+pn) \times (pm)}.$$

In this case, the quadratic performance index function given by (8) can be written as

$$J = \sum_{i=1}^{\infty} \left[ X_0^T(i) (\tilde{C}_0^T \overline{Q} \tilde{C}_0) X_0(i) + \tilde{u}^T(i) \overline{H} \tilde{u}(i) \right] = \sum_{i=1}^{\infty} \left[ X_0^T(i) \mathcal{Q}_0 X_0(i) + \tilde{u}^T(i) \overline{H} \tilde{u}(i) \right], \quad (11)$$

where

$$\mathcal{Q}_0 = \begin{bmatrix} \overline{Q} & 0 \\ 0 & 0 \end{bmatrix} \in \mathbf{R}^{(pm+pn) \times (pm+pn)}.$$

So far, the problem is reduced to design an optimal preview controller for (10) which minimizes the quadratic performance index function (11).

It can be seen that the difference of  $\tilde{u}(i)$  is not included in (10), so that the sum

of  $\bar{e}(i)$  is not contained in the control input, which makes the **closed-loop system without an integrator**. **This** is not beneficial to eliminate static error. Therefore, an integrator is introduced for this purpose

$$\bar{v}(i+1) = \bar{v}(i) + \bar{e}(i) \quad . \quad (12)$$

Let  $\bar{v}(\infty) = \lim_{i \rightarrow \infty} \bar{v}(i)$ , and define  $\tilde{v}(i) = \bar{v}(i) - \bar{v}(\infty)$ , (12) can be **rewritten** as

$$\tilde{v}(i+1) = \tilde{v}(i) + \bar{e}(i) \quad . \quad (13)$$

**Later**, define  $X_1(i) = \begin{bmatrix} X_0(i) \\ \tilde{v}(i) \end{bmatrix}$  and combining (10) and (13) gives

$$\begin{cases} X_1(i+1) = \tilde{A}_1 X_1(i) + \tilde{B}_1 \tilde{u}(i) + \tilde{G}_{R1} \tilde{R}(i+1) \\ \bar{e}(i) = \tilde{C}_1 X_1(i) \end{cases} \quad , \quad (14)$$

where

$$\tilde{A}_1 = \begin{bmatrix} \tilde{A}_0 & 0 \\ \tilde{C}_0 & I \end{bmatrix}, \tilde{B}_1 = \begin{bmatrix} \tilde{B}_0 \\ 0 \end{bmatrix}, \tilde{G}_{R1} = \begin{bmatrix} \tilde{G}_{R0} \\ 0 \end{bmatrix}, \tilde{C}_1 = \begin{bmatrix} \tilde{C}_0 & 0 \end{bmatrix}.$$

For the system (14), if  $J$  in (11) is considered as the quadratic performance index function, the requirement that the corresponding Riccati has a unique positive solution will not be satisfied (Shinzo *et al.*, 1992). **Thus**, the quadratic performance index function is revised to

$$\begin{aligned} \tilde{J} &= J + \sum_{i=1}^{\infty} \tilde{v}^T(i) Q_v \tilde{v}(i) \\ &= \sum_{i=1}^{\infty} [X_0^T(i) Q_0 X_0(i) + \tilde{u}^T(i) \bar{H} \tilde{u}(i) + \tilde{v}^T(i) Q_v \tilde{v}(i)] \\ &= \sum_{i=1}^{\infty} [X_1^T(i) Q X_1(i) + \tilde{u}^T(i) \bar{H} \tilde{u}(i)] \quad , \quad (15) \end{aligned}$$

where  $Q = \begin{bmatrix} Q_0 & 0 \\ 0 & Q_v \end{bmatrix}$ ,  $Q_v > 0$ .

Due to the fact that  $\tilde{J}$  reaches the minimum **while**  $J$  **does**, the controller can be designed with  $\tilde{J}$  (Shinzo *et al.*, 1992).

## 5. Design of Optimal Preview Controller

**Lemma 1**(Katayama *et al.*, 1987)  $(\tilde{A}_1, \tilde{B}_1)$  is stabilizable if and only if  $(\bar{A}, \bar{B})$

is stabilizable and  $\begin{bmatrix} I - \bar{A} & \bar{B} \\ \bar{C} & 0 \end{bmatrix}$  has full row rank.

**Lemma 2**(Katayama *et al.*, 1987)  $(Q^{1/2}, \tilde{A}_1)$  is detectable if and only if  $(\bar{C}, \bar{A})$  is detectable.

According to Katayama *et al.* (1987), the following theorem can be obtained from the preview control theory.

**Theorem 1** Supposing that **A1, A2, and A3** hold, the preview controller for System (14) that minimizes the quadratic performance index (15) is given by

$$\begin{aligned} \tilde{u}(i) &= F_0 X_1(i) + \sum_{j=1}^{M_R} F_R(j) \tilde{R}(i+j) \\ &= F_e \bar{e}(i) + F_x \tilde{x}(i) + F_v \tilde{v}(i) + \sum_{j=1}^{M_R} F_R(j) \tilde{R}(i+j), \end{aligned} \quad (16)$$

where

$$\begin{aligned} F_0 &= [F_e \quad F_x \quad F_v] = -[\bar{H} + \tilde{B}_1^T \bar{P} \tilde{B}_1]^{-1} \tilde{B}_1^T \bar{P} \tilde{A}_1, \\ F_R(j) &= -[\bar{H} + \tilde{B}_1^T \bar{P} \tilde{B}_1]^{-1} \tilde{B}_1^T (\xi^T)^{j-1} \bar{P} \tilde{G}_{R1} \quad j=1, \dots, M_R, \\ \xi &= \tilde{A}_1 + \tilde{B}_1 F_0. \end{aligned}$$

$\bar{P}$  is the semi-positive definite solution of Riccati equation

$$\bar{P} = Q + \tilde{A}_1^T \bar{P} \tilde{A}_1 - \tilde{A}_1^T \bar{P} \tilde{B}_1 [\bar{H} + \tilde{B}_1^T \bar{P} \tilde{B}_1]^{-1} \tilde{B}_1^T \bar{P} \tilde{A}_1.$$

Proof: First, according to Katayama *et al.* (1987), the theorem holds if and only if  $(\tilde{A}_1, \tilde{B}_1)$  is stabilizable,  $(Q^{1/2}, \tilde{A}_1)$  is detectable and the reference signal is previewable. From Lemma 1 and Lemma 2,  $(\tilde{A}_1, \tilde{B}_1)$  is stabilizable if and only if

$(\bar{A}, \bar{B})$  is stabilizable and the matrix  $\begin{bmatrix} I - \bar{A} & \bar{B} \\ \bar{C} & 0 \end{bmatrix}$  has full row rank.  $(Q^{1/2}, \tilde{A}_1)$  is

detectable if and only if  $(\bar{C}, \bar{A})$  is detectable. Therefore, the theorem holds if **A1, A2, and A3** are satisfied. This completes the Theorem 1.

Furthermore, based on (16),  $\bar{u}(i)$  can be derived

$$\bar{u}(i) = \bar{u}(\infty) + F_e \bar{e}(i) + F_x [\bar{x}(i) - \bar{x}(\infty)] + F_v \left( \sum_{s=0}^{i-1} \bar{e}(s) + \bar{v}(0) - \bar{v}(\infty) \right) + \sum_{j=1}^{M_R} F_R(j) (\bar{R}(i+j) - \bar{R})$$

Partition  $F_e, F_x, F_v$  and  $F_R(j)$  in Theorem 1 as

$$F_e = \begin{bmatrix} F_e^{(1)} \\ F_e^{(2)} \\ \vdots \\ F_e^{(p)} \end{bmatrix} = \begin{bmatrix} F_e(1,1) & F_e(1,2) & \cdots & F_e(1,p) \\ F_e(2,1) & F_e(2,2) & \cdots & F_e(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_e(p,1) & F_e(p,2) & \cdots & F_e(p,p) \end{bmatrix},$$

$$F_x = \begin{bmatrix} F_x^{(1)} \\ F_x^{(2)} \\ \vdots \\ F_x^{(p)} \end{bmatrix} = \begin{bmatrix} F_x(1,1) & F_x(1,2) & \cdots & F_x(1,p) \\ F_x(2,1) & F_x(2,2) & \cdots & F_x(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_x(p,1) & F_x(p,2) & \cdots & F_x(p,p) \end{bmatrix},$$

$$F_v = \begin{bmatrix} F_v^{(1)} \\ F_v^{(2)} \\ \vdots \\ F_v^{(p)} \end{bmatrix} = \begin{bmatrix} F_v(1,1) & F_v(1,2) & \cdots & F_v(1,p) \\ F_v(2,1) & F_v(2,2) & \cdots & F_v(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_v(p,1) & F_v(p,2) & \cdots & F_v(p,p) \end{bmatrix},$$

$$F_R(j) = \begin{bmatrix} F_R^{(1)}(j) \\ F_R^{(2)}(j) \\ \vdots \\ F_R^{(p)}(j) \end{bmatrix} = \begin{bmatrix} F_R(1,1,j) & F_R(1,2,j) & \cdots & F_R(1,p,j) \\ F_R(2,1,j) & F_R(2,2,j) & \cdots & F_R(2,p,j) \\ \vdots & \vdots & \ddots & \vdots \\ F_R(p,1,j) & F_R(p,2,j) & \cdots & F_R(p,p,j) \end{bmatrix},$$

where  $F_e(i,j) \in R^{r \times m}$ ,  $F_x(i,j) \in R^{r \times n}$ ,  $F_v(i,j) \in R^{r \times m}$ ,  $F_R(i,j) \in R^{r \times m}$  ( $i, j = 1, 2, \dots, p$ ).

Then, the following equation can be obtained

$$\begin{bmatrix} u(pi) \\ u(pi+1) \\ \vdots \\ u(pi+p-1) \end{bmatrix} = \bar{u}(\infty) + \begin{bmatrix} F_e^{(1)} \\ F_e^{(2)} \\ \vdots \\ F_e^{(p)} \end{bmatrix} \bar{e}(i) + \begin{bmatrix} F_x^{(1)} \\ F_x^{(2)} \\ \vdots \\ F_x^{(p)} \end{bmatrix} [\bar{x}(i) - \bar{x}(\infty)] + \begin{bmatrix} F_v^{(1)} \\ F_v^{(2)} \\ \vdots \\ F_v^{(p)} \end{bmatrix} \left( \sum_{s=0}^{i-1} \bar{e}(s) + \bar{v}(0) - \bar{v}(\infty) \right) + \sum_{j=1}^{M_R} \begin{bmatrix} F_R^{(1)}(j) \\ F_R^{(2)}(j) \\ \vdots \\ F_R^{(p)}(j) \end{bmatrix} [\bar{R}(i+j) - \bar{R}]$$

$$= \bar{u}(\infty) + \begin{bmatrix} F_e(1,1) & F_e(1,2) & \cdots & F_e(1,p) \\ F_e(2,1) & F_e(2,2) & \cdots & F_e(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_e(p,1) & F_e(p,2) & \cdots & F_e(p,p) \end{bmatrix} \bar{e}(i) + \begin{bmatrix} F_x(1,1) & F_x(1,2) & \cdots & F_x(1,p) \\ F_x(2,1) & F_x(2,2) & \cdots & F_x(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_x(p,1) & F_x(p,2) & \cdots & F_x(p,p) \end{bmatrix} [\bar{x}(i) - \bar{x}(\infty)]$$

$$+ \begin{bmatrix} F_v(1,1) & F_v(1,2) & \cdots & F_v(1,p) \\ F_v(2,1) & F_v(2,2) & \cdots & F_v(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_v(p,1) & F_v(p,2) & \cdots & F_v(p,p) \end{bmatrix} \sum_{s=0}^{i-1} \bar{e}(s) + \begin{bmatrix} F_v(1,1) & F_v(1,2) & \cdots & F_v(1,p) \\ F_v(2,1) & F_v(2,2) & \cdots & F_v(2,p) \\ \vdots & \vdots & \ddots & \vdots \\ F_v(p,1) & F_v(p,2) & \cdots & F_v(p,p) \end{bmatrix} (\bar{v}(0) - \bar{v}(\infty))$$

$$+ \sum_{j=1}^{M_R} \begin{bmatrix} F_R(1,1,j) & F_R(1,2,j) & \cdots & F_R(1,p,j) \\ F_R(2,1,j) & F_R(2,2,j) & \cdots & F_R(2,p,j) \\ \vdots & \vdots & & \vdots \\ F_R(p,1,j) & F_R(p,2,j) & \cdots & F_R(p,p,j) \end{bmatrix} [\bar{R}(i+j) - \bar{R}],$$

where  $\bar{u}(\infty)$ ,  $\bar{x}(\infty)$ , and  $\bar{v}(\infty)$  represent the steady-state values of  $\bar{u}(i)$ ,  $\bar{x}(i)$ , and  $\bar{v}(i)$  at infinity, respectively.

According to the definitions of  $\bar{e}(i)$ ,  $\bar{x}(i)$ , and  $\bar{R}(i)$ , the above formula can be written by component as:

$$\begin{aligned} u(pi+q-1) &= \bar{u}_q(\infty) + \sum_{j=1}^p F_e(q,j)e(p(i-1)+j) + \sum_{j=1}^p F_x(q,j)[x(p(i-1)+j) - \bar{x}_j(\infty)] \\ &+ \sum_{j=1}^p F_v(q,j) \left( \sum_{s=0}^{i-1} e(p(s-1)+j) + \bar{v}_j(0) - \bar{v}_j(\infty) \right) + \sum_{j=1}^{M_R} \sum_{s=1}^p F_R(q,s,j)[R(p(i+j-1)+s) - \bar{R}(s)] \end{aligned}$$

$$q = 1, 2, \dots, p.$$

Thus, Theorem 2 is concluded.

**Theorem 2** Supposing that A1, A2, and A3 hold, the preview controller for System (1) is:

$$\begin{aligned} u(pi+q-1) &= \bar{u}_q(\infty) + \sum_{j=1}^p F_e(q,j)e(p(i-1)+j) + \sum_{j=1}^p F_x(q,j)[x(p(i-1)+j) - \bar{x}_j(\infty)] \\ &+ \sum_{j=1}^p F_v(q,j) \left( \sum_{s=0}^{i-1} e(p(s-1)+j) + \bar{v}_j(0) - \bar{v}_j(\infty) \right) + \sum_{j=1}^{M_R} \sum_{s=1}^p F_R(q,s,j)[R(p(i+j-1)+s) - \bar{R}(s)] \end{aligned}$$

$$q = 1, 2, \dots, p, \quad (17)$$

where  $\bar{u}_j(\infty)$  and  $\bar{x}_j(\infty)$  represent the  $j$ -th component of the steady-state values of the control input and state vector at infinity, respectively.  $\bar{R}(s)$  represents for the  $s$ -th component of the steady-state value  $\bar{R}$ .

While A2 holds, the equation (5) has solutions. Thus,  $\bar{u}(\infty)$  and  $\bar{x}(\infty)$  can take one of its solutions arbitrarily. In application problems, sometimes, for the sake of simplicity,  $\bar{u}(\infty)$  and  $\bar{x}(\infty)$  can be assigned directly. The numerical simulation shows that it does not affect the output response of the system in this

way. Because the identical equation of  $\bar{v}(\infty)$  can be obtained by letting  $i \rightarrow \infty$  in both sides of (13),  $\bar{v}(\infty)$  can also be assigned according to the practical condition.

In (17),  $\sum_{j=1}^p F_e(q, j)e(p(i-1) + j)$  is the tracking error signal compensation;

$\sum_{j=1}^p F_x(q, j)[x(p(i-1) + j) - \bar{x}_\infty(j)]$  is the state feedback;

$\sum_{j=1}^p F_v(q, j) \sum_{s=0}^{i-1} e(p(s-1) + j)$  is an integrator;

$\sum_{j=1}^{M_R} \sum_{s=1}^p F_R(q, s, j)[R(p(i+j-1) + s) - \bar{R}(s)]$  is the preview feed-forward compensation.

## 6. Numerical Simulation

In this section, two numerical examples are provided to evaluate our design method. The first one compares the controller performance with different preview lengths in order to illustrate the benefits of the controller with preview compensation. The second one compares the proposed method with the method of Liao *et al.*(2019) based on the same preview length, and the corresponding results are presented.

### Example 1

Consider linear discrete-time periodic System (1) with the period of  $p = 3$ .

Supposing that the coefficient matrices of System (1) are

$$A_0 = \begin{bmatrix} 0.5 & 0.02 \\ 0.1 & 1.1 \end{bmatrix}, A_1 = \begin{bmatrix} 1.5 & 0.1 \\ 1 & 0.02 \end{bmatrix}, A_2 = \begin{bmatrix} 0.01 & 0.6 \\ 1.3 & 0.5 \end{bmatrix}$$

$$B_0 = \begin{bmatrix} 6 \\ 2 \end{bmatrix}, B_1 = \begin{bmatrix} -0.999 \\ 2 \end{bmatrix}, B_2 = \begin{bmatrix} 1 \\ 0.88 \end{bmatrix},$$

$$C_0 = [1.01 \ 0], C_1 = [1 \ 0], C_2 = [0.999 \ 0]$$

Select  $\bar{Q} = \begin{bmatrix} 4 & 0 & 0.2 \\ 0 & 1 & 0 \\ 0.2 & 0 & 1 \end{bmatrix}$ ,  $\bar{H} = \text{diag}(0.1, 0.5, 0.5)$ ,  $Q_v = \text{diag}(0.1, 0.1, 0.1)$ .

By calculating, it indicates that the **assumptions A1-A3** are satisfied. Hence, the corresponding augmented system verifies all the conditions of Theorem 1. After solving the Riccati equation by Matlab, the gain matrices  $F_e$ ,  $F_x$ ,  $F_v$  can be obtained

$$F_0 = \begin{bmatrix} -0.0188 & -0.0063 & -0.0023 & 0 & 0 & 0 & 0 & -0.8287 & -0.0064 & -0.0188 & -0.0063 & -0.0023 \\ -0.1414 & 0.1604 & -0.0388 & 0 & 0 & 0 & 0 & -0.0698 & 0.0497 & -0.1414 & 0.1604 & -0.0388 \\ 0.2213 & -0.1398 & -0.1782 & 0 & 0 & 0 & 0 & 0.0640 & -0.0463 & 0.2213 & -0.1398 & -0.1782 \end{bmatrix}$$

$$F_e = \begin{bmatrix} -0.0188 & -0.0063 & -0.0023 \\ -0.1414 & 0.1604 & -0.0388 \\ 0.2213 & -0.1398 & -0.1782 \end{bmatrix}$$

$$F_x = \begin{bmatrix} 0 & 0 & 0 & 0 & -0.8287 & -0.0064 \\ 0 & 0 & 0 & 0 & -0.0698 & 0.0497 \\ 0 & 0 & 0 & 0 & 0.0640 & -0.0463 \end{bmatrix}$$

$$F_v = \begin{bmatrix} -0.0188 & -0.0063 & -0.0023 \\ -0.1414 & 0.1604 & -0.0388 \\ 0.2213 & -0.1398 & -0.1782 \end{bmatrix}$$

The simulation can be performed in three scenarios with the preview length of  $M_R = 0, M_R = 1, M_R = 9$ . Let the reference signal be

$$R(k) = \begin{cases} 0, & k < 22 \\ \frac{1}{20}(k-22), & 22 \leq k \leq 62 \\ 2, & k > 62 \end{cases}$$

According to

$$\begin{cases} \bar{x}(\infty) = \bar{A}\bar{x}(\infty) + \bar{B}\bar{u}(\infty) \\ \bar{R} = \bar{C}\bar{x}(\infty) \end{cases}$$

In this case, because of both input and output are scalar, equation (5) has a unique solution.



$$\bar{x}(\infty) = \begin{bmatrix} 1.9802 \\ 2.1387 \\ 2.0000 \\ 4.3937 \\ 2.0020 \\ 4.2211 \end{bmatrix}, \bar{u}(\infty) = \begin{bmatrix} -1.3524 \\ 1.1854 \\ -0.6542 \end{bmatrix}.$$

In view of the above three cases, the initial values of the state vector and control input are chosen as  $x(-2) = x(-1) = x(0) = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$ ,  $u(0) = u(1) = u(2) = 0$ . The initial

condition of  $\bar{v}(k)$  is  $\bar{v}(0) = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$ . The steady-state value of  $\bar{v}(k)$  at infinity are

$$\text{chosen as } \bar{v}(\infty) = \begin{bmatrix} -15 \\ -5.5 \\ -8 \end{bmatrix}, \bar{v}(\infty) = \begin{bmatrix} 1 \\ 2 \\ 0.02 \end{bmatrix}, \bar{v}(\infty) = \begin{bmatrix} 1 \\ 1.2 \\ 0.15 \end{bmatrix}.$$

Figure 1 shows that the output response of the given system in the case of  $M_R = 0, M_R = 1, M_R = 9$ , where the black line represents the reference signal.

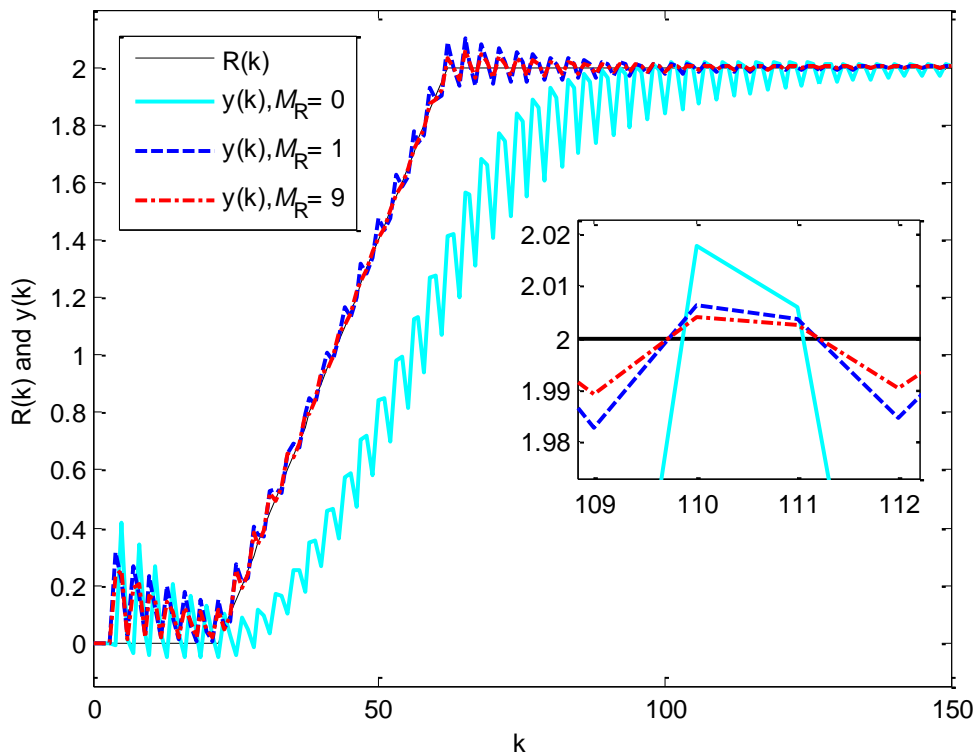


Fig.1 The output response of the closed-loop system

It can be seen from **Figure 1** that the controller with preview compensation can make the output track the reference signal more quickly and make the tracking error become smaller than those without preview action.

In order to see the tracking effect more clearly, the tracking error in three cases of  $M_R = 0, M_R = 1, M_R = 9$  is shown in **Figure 2**.

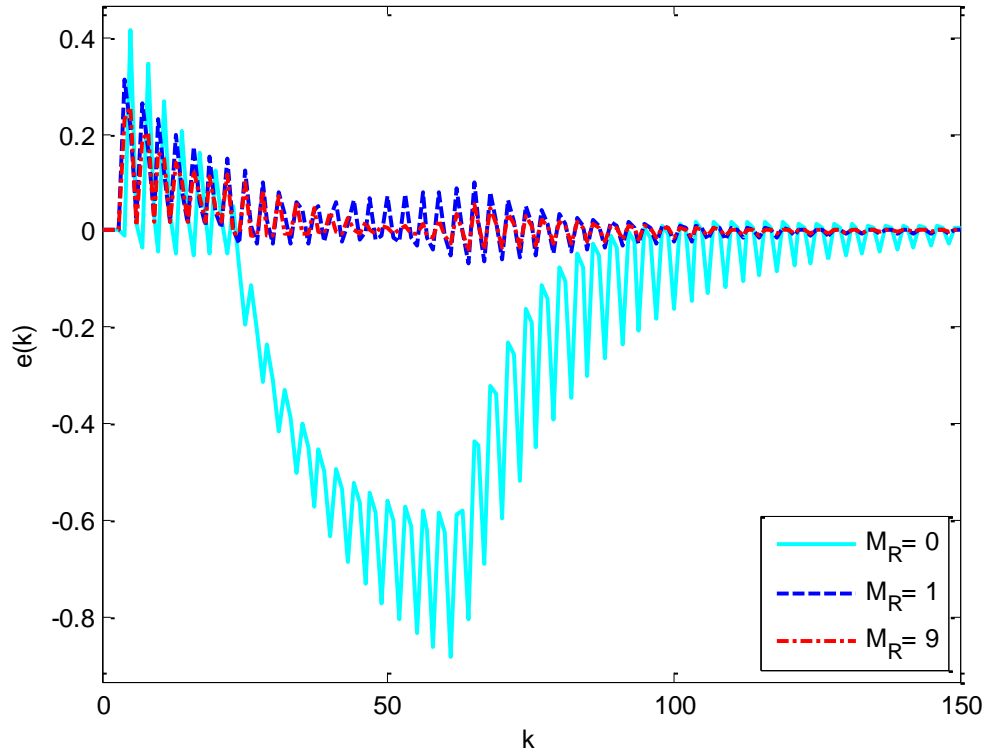


Fig.2 The tracking error

It can be observed from **Figure 2** that the controller with preview compensation can reduce the tracking error of the system.

### Example 2

Consider linear discrete-time periodic System (1) with the period of  $p = 3$ .

Supposing that the coefficient matrices of System (1) are

$$A_0 = \begin{bmatrix} -2 & 2 \\ 0.2 & 1 \end{bmatrix}, A_1 = \begin{bmatrix} 2.9 & 1 \\ -0.1 & 1.3 \end{bmatrix}, A_2 = \begin{bmatrix} 0.89 & 1 \\ 0.01 & 0.99 \end{bmatrix}$$

$$B_0 = \begin{bmatrix} 3 \\ 0.05 \end{bmatrix}, B_1 = \begin{bmatrix} 0.01 \\ 1.1 \end{bmatrix}, B_2 = \begin{bmatrix} 0.2 \\ 0.9 \end{bmatrix},$$

$$C_0 = [2 \ 0], C_1 = [1 \ 0], C_2 = [3 \ 0]$$

$$\text{Select } \bar{Q} = \begin{bmatrix} 0.4 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \bar{H} = \text{diag}(0.1, 0.5, 0.5), Q_v = \text{diag}(0.1, 0.1, 0.1).$$

The assumptions A1-A3 are satisfied by calculation. Hence, the corresponding augmented system verifies all the conditions of Theorem 1.

The reference signal is set as

$$R(k) = \begin{cases} 0, & k < 22 \\ \frac{1}{20}(k-22), & 22 \leq k \leq 62 \\ 2, & k > 62 \end{cases}$$

In order to illustrate the effectiveness of the proposed method in this paper, it is compared with the method in Liao *et al.* (2019). To facilitate the comparison, the following two cases are taken into consideration. The simulation can be performed in the scenarios with the preview length of  $M_R = 9$ .

### Case 1. (Proposed method $M_R = 9$ )

Solving the Riccati equation gives

$$F_0 = \begin{bmatrix} -0.0106 & -0.0200 & -0.0026 & 0 & 0 & 0 & 0 & 0.6385 & -0.7816 & -0.0106 & -0.0200 & -0.0026 \\ 0.0310 & 0.1754 & -0.0699 & 0 & 0 & 0 & 0 & -0.2463 & -1.0331 & 0.0310 & 0.1754 & -0.0699 \\ 0.2156 & -0.2464 & 0.0543 & 0 & 0 & 0 & 0 & -0.0829 & -0.3349 & 0.2156 & -0.2464 & 0.0543 \end{bmatrix}$$

$$F_e = \begin{bmatrix} -0.0106 & -0.0200 & -0.0026 \\ 0.0310 & 0.1754 & -0.0699 \\ 0.2156 & -0.2464 & 0.0543 \end{bmatrix}$$

$$F_x = \begin{bmatrix} 0 & 0 & 0 & 0 & 0.6385 & -0.7816 \\ 0 & 0 & 0 & 0 & -0.2463 & -1.0331 \\ 0 & 0 & 0 & 0 & -0.0829 & -0.3349 \end{bmatrix}$$

$$F_v = \begin{bmatrix} -0.0106 & -0.0200 & -0.0026 \\ 0.0310 & 0.1754 & -0.0699 \\ 0.2156 & -0.2464 & 0.0543 \end{bmatrix}$$

According to

$$\begin{cases} \bar{x}(\infty) = \bar{A}\bar{x}(\infty) + \bar{B}\bar{u}(\infty) \\ \bar{R} = \bar{C}\bar{x}(\infty) \end{cases}.$$

In this case, because of both input and output are scalar, equation (5) has a unique solution.

$$\bar{x}(\infty) = \begin{bmatrix} 1.0000 \\ -0.9015 \\ 2.0000 \\ -1.1052 \\ 0.6667 \\ -1.1108 \end{bmatrix}, \bar{u}(\infty) = \begin{bmatrix} 1.5183 \\ 0.1516 \\ -0.0407 \end{bmatrix}.$$

**Case 2. ( Liao et al. 2019  $M_R = 9$ )**

Solving the Riccati equation gives

$$F_0 = \begin{bmatrix} -0.0153 & -0.0697 & -0.0145 & 0 & 0 & 0 & 0 & 0.6373 & -0.7866 \\ 0.0060 & 0.5637 & -0.2123 & 0 & 0 & 0 & 0 & -0.2289 & -0.9610 \\ 0.4857 & -0.6887 & 0.1688 & 0 & 0 & 0 & 0 & -0.1371 & -0.5589 \end{bmatrix}$$

$$F_e = \begin{bmatrix} -0.0153 & -0.0697 & -0.0145 \\ 0.0060 & 0.5637 & -0.2123 \\ 0.4857 & -0.6887 & 0.1688 \end{bmatrix}$$

$$F_x = \begin{bmatrix} 0 & 0 & 0 & 0 & 0.6373 & -0.7866 \\ 0 & 0 & 0 & 0 & -0.2289 & -0.9610 \\ 0 & 0 & 0 & 0 & -0.1371 & -0.5589 \end{bmatrix}.$$

In view of the above cases, the initial values of the state vector and control input are chosen as  $x(-2) = x(-1) = x(0) = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$ ,  $u(0) = u(1) = u(2) = 0$ . Let the initial

condition of  $\bar{v}(k)$  be  $\bar{v}(0) = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$  and the steady-state value of  $\bar{v}(k)$  at infinity be

$$\bar{v}(\infty) = \begin{bmatrix} -0.2 \\ 0.1 \\ -0.06 \end{bmatrix}.$$

In the following, the simulation results of the proposed controller are illustrated in comparison with the work of Liao *et al.* (2019). Figure 3 shows the output response

of the given system in the above two cases with the preview length of  $M_R = 9$ , where the black line represents the reference signal.

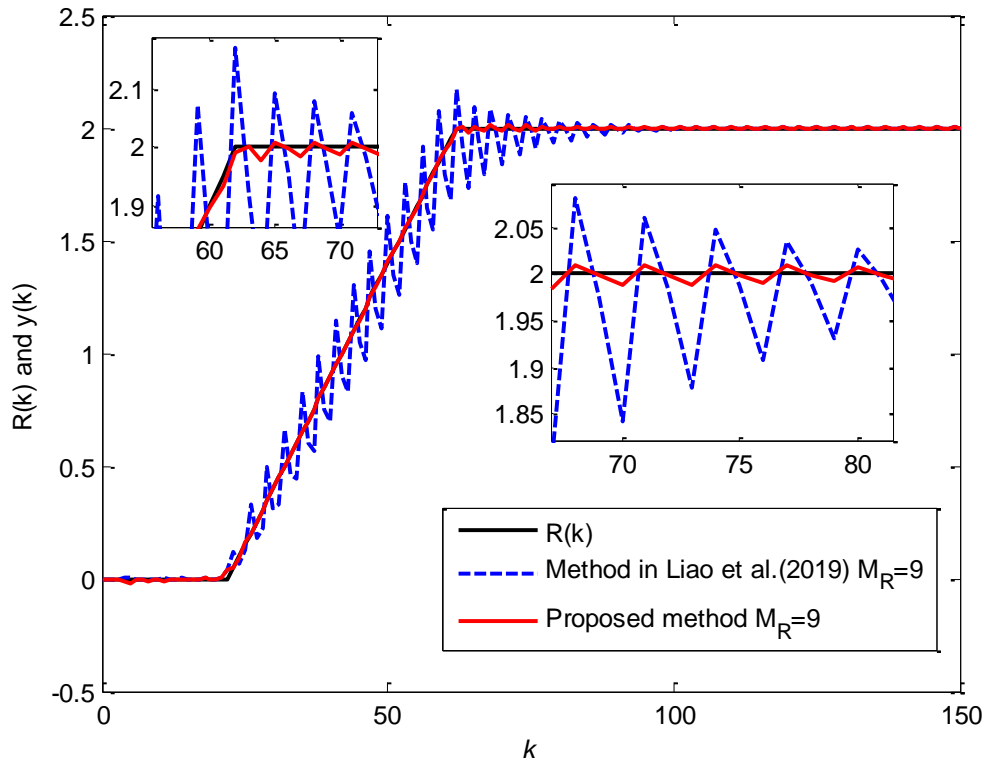


Fig.3 The output response of the closed-loop system

Viewing from the Figure 3, the controller in this paper makes the output track the desired reference signal faster and makes the tracking error become smaller than those in Liao *et al.* (2019). Moreover, under the same preview length, the tracking performance of the proposed method is better than that of Liao *et al.* (2019).

In order to see the tracking effect more clearly, the tracking errors are shown in Figure 4.

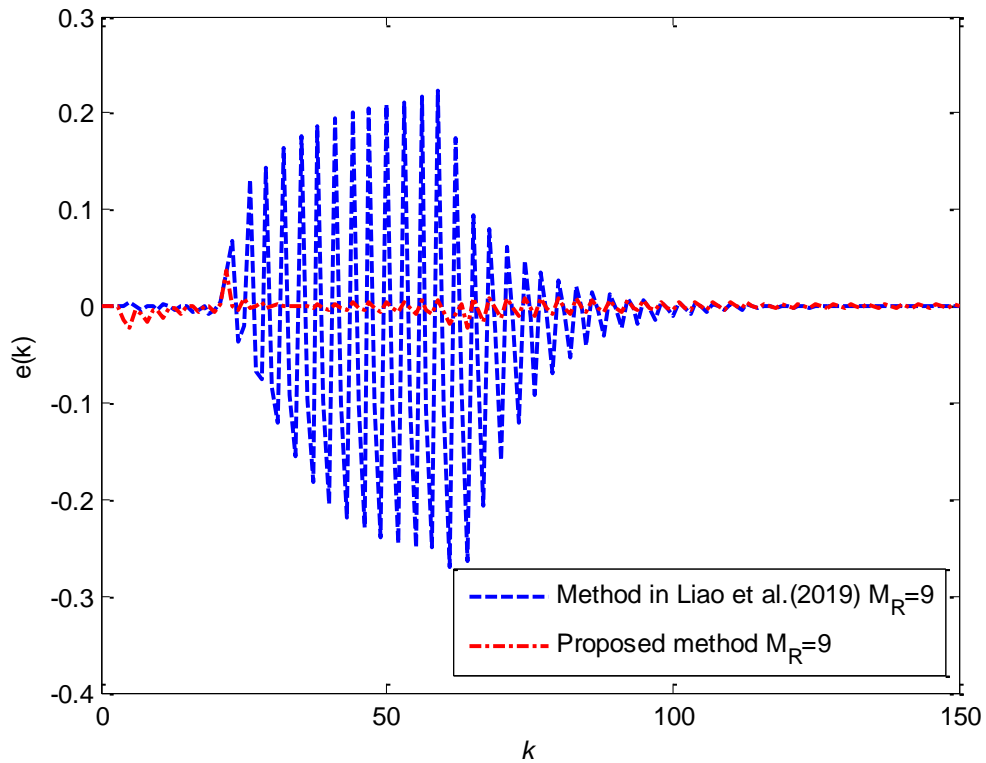


Fig.4 The tracking error

Figure 4 reveals that the tracking error using the suggested method is smaller than that of Liao *et al.* (2019), thereby demonstrating the advantages and effectiveness of the proposed controller approach.

## 7. Conclusion

In this paper, a new method to design an optimal preview controller for linear discrete-time periodic systems is provided. Combining the preview control method with the lifting method of periodic systems, the augmented system is constructed by the difference between the state and its steady-state value. In order to guarantee that the output of the closed-loop system tracks the reference signal without static error, an integrator is introduced. Compared with the previous work, the simulation results show the effectiveness and merits of the suggested control method.

## Declaration of conflicting interest

The authors declare that there is no conflict of interest.

## Funding

This work was supported by National Key R&D Program of China (2017YFF0207401) and the Oriented Award Foundation for Science and Technological Innovation, Inner Mongolia Autonomous Region, China (2012).

## Reference

Allen MS, Sracic MW, Chauhan S, *et al.* (2011) Output-only modal analysis of linear time-periodic systems with application to wind turbine simulation data. *Mechanical Systems and Signal Processing* 25(4): 1174-1191.

Arcara P, Bittanti S, Lovera M (2000) Periodic control of helicopter rotors for attenuation of vibrations in forward flight. *IEEE Transactions on Control Systems Technology* 8(6): 883-894.

Birla N, Swarup A (2015) Optimal preview control: A review. *Optimal Control Applications and Methods* 36(2): 241-268.

Chen J, Wang J, Yang Y, *et al.* (2012) A motion control method of four-wheel drive omni-directional mobile robots based on multi points preview control. *Journal of Theoretical and Applied Information Technology* 45(1): 278-284.

Gershon E, Shaked U (2014)  $H_\infty$  preview tracking control of retarded state-multiplicative stochastic systems. *International Journal of Robust and Nonlinear Control* 24: 2119-2135.

Gohrle C, Schindler A, Wagner A, *et al.* (2014) Design and vehicle implementation of preview active suspension control. *IEEE Transactions on Control Systems Technology* 22(3): 1135-1142.

Katayama T, Hirono T (1987) Design of an optimal servomechanism with preview action and its dual problem. *International Journal of Control* 45 (2): 407-420.

Liao FC, Cao MJ, Hu ZX, *et al.* (2012) Design of an optimal preview controller for linear discrete-time causal descriptor systems. *International Journal of Control* 85(10): 1616-1624.

Liao FC, Lu YR, Liu HY (2016) Cooperative optimal preview tracking control of continuous-time multi-agent systems. *International Journal of Control* 89(10):

2019-2028.

Liao FC, Sun MY, Usman (2019) Optimal preview control for linear discrete-time periodic systems. *Mathematical Problem in Engineering* 2019: 1-11.

Liao FC, Takaba K, Katayama T, *et al.* (2003) Design of an optimal preview servomechanism for discrete-time systems in a multirate setting. *Dynamics of Continuous, Discrete and Impulsive Systems* 10(5):727-744.

Li P, Lam J and Cheung KC (2014) Multi-objective control for active vehicle suspension with wheelbase preview. *Journal of Sound and Vibration* 333(21): 5269-5282.

Li D, Zhou D, Hu Z, *et al.* (2001) Optimal preview control applied to terrain following flight. In: *Proceedings of the 40th IEEE Conference on Decision and Control*, Orlando FL, USA, 4-7 Dec, 2001, pp. 211-216. New York: IEEE.

Lovera M, De Marchi E, Bittanti S (2002) Periodic attitude control techniques for small satellites with magnetic actuators. *IEEE Transactions on control systems technology* 10(1): 90-95.

Lv LL (2017) *Robust control of linear discrete-time periodic systems*. Beijing: Science Press.

Lv LL and Zhang L (2016) On the periodic Sylvester equations and their applications in periodic Luenberger observers design. *Journal of the Franklin Institute* 353(5): 1005-1018.

Mianzo L, Peng H (2007) Output feedback preview control of an electromechanical valve actuator. *IEEE Transactions on Control Systems Technology* 15(3): 428-437.

Negm MMM, Bakhshwain JM and Shwehdi MH (2006) Speed control of a three-phase induction motor based on robust optimal preview control theory. *IEEE transactions on energy conversion* 21(1): 77-84.

Ozdemir AA, Seiler P and Balas GJ (2013) Design tradeoffs of wind turbine preview control. *IEEE Transactions on Control Systems Technology* 21(4): 1143-1154.

Pipeleers G, Swevers J (2010) Optimal feedforward controller design for periodic inputs. *International Journal of Control* 83(5): 1044–1053.

Sheriden TB (1966) Three models of preview control. *IEEE Transactions on*



*Automatic Control* 7(2): 91-102.

Shinzo E, Shinying S (1992) *Matrix theory of system control*. Tokyo: Institute of Automatic Measurement Control.

Shimmyo S, Sato T and Ohnishi K (2013) Biped walking pattern generation by using preview control based on three-mass model. *IEEE Transactions on Industrial Electronics* 60(11): 5137-5147.

Varga A (2004) Design of fault detection filters for periodic systems. In: *Proceedings of the 43rd IEEE Conference on Decision and Control*, Nassau, Bahamas, 14-17 Dec, 2004, pp. 4800-4805. New York: IEEE.

Yang YG (2018) An efficient LQR design for discrete-time linear periodic system based on a novel lifting method. *Automatica* 87(5): 383-388.

Zhang CL (2000) Preview control theory. *Shipborne weapons* 2(1):33-66.

Zhang XM, Wang ZL (1996) Research of preview control method on robot. *Journal of Beijing University of Aeronautics and Astronautics* 22(1): 21-26.