

Citation:

Hanley, B and Tucker, C (2018) Comparisons between systems to measure contact and flight times in elite race walking. In: 23rd Annual Congress of the European College of Sport Science, 04 July 2018 - 07 July 2018, Dublin, Ireland. (Unpublished)

Link to Leeds Beckett Repository record: https://eprints.leedsbeckett.ac.uk/id/eprint/5174/

Document Version:
Conference or Workshop Item (Published Version)

The aim of the Leeds Beckett Repository is to provide open access to our research, as required by funder policies and permitted by publishers and copyright law.

The Leeds Beckett repository holds a wide range of publications, each of which has been checked for copyright and the relevant embargo period has been applied by the Research Services team.

We operate on a standard take-down policy. If you are the author or publisher of an output and you would like it removed from the repository, please contact us and we will investigate on a case-by-case basis.

Each thesis in the repository has been cleared where necessary by the author for third party copyright. If you would like a thesis to be removed from the repository or believe there is an issue with copyright, please contact us on openaccess@leedsbeckett.ac.uk and we will investigate on a case-by-case basis.



Comparisons between Systems to Measure Contact and Flight Times in Elite Race Walking

Brian Hanley & Catherine B. Tucker Carnegie School of Sport, Leeds Beckett University

b.hanley@leedsbeckett.ac.uk




Introduction

Race walking is an Olympic event dictated by a rule that states that no visible loss of contact with the ground should occur and that the leg must be straightened from first contact with the ground until the 'vertical upright position' (IAAF Rule 230.2). The measurement of flight times during race walking is therefore of great interest to coaches, athletes and judges. Given the importance of flight time measurements, using a valid and reliable system is critical in determining the actual duration of flight time as part of a training programme or sport science support. The aim of the study was to compare different methodologies used to measure contact and flight time in race walking.



Methods

11 male race walkers (1.77 m (\pm 0.06), 64.4 kg (\pm 4.7)) and 7 female race walkers (1.68 m (\pm 0.10), 56.7 kg (\pm 11.0)) participated. 15 of the athletes had competed at the 2016 Olympic Games or 2017 World Championships. The men race walked down an indoor track at 11, 12, 13, 14 and 15 km/h, whereas the women's trials were at 10, 11, 12, 13 and 14 km/h. Contact and flight times were measured using three adjacent 900 x 600 mm Kistler force plates (1000 Hz), 5 x 1 m strips of an OptoJump Next system (1000 Hz) and a Fastec high-speed camera (500 Hz). Results from the OptoJump Next system were extracted using five settings based on the number of LEDs that needed activating (contact begins after_contact ends when), and were annotated as 0_0, 1_1, 2_2, 3_3 and 4_4. The force plate values were considered the criterion values and measurements were assessed for reliability using Intraclass Correlation Coefficients (ICC) and 95% limits of agreement (LOA: bias \pm random error).

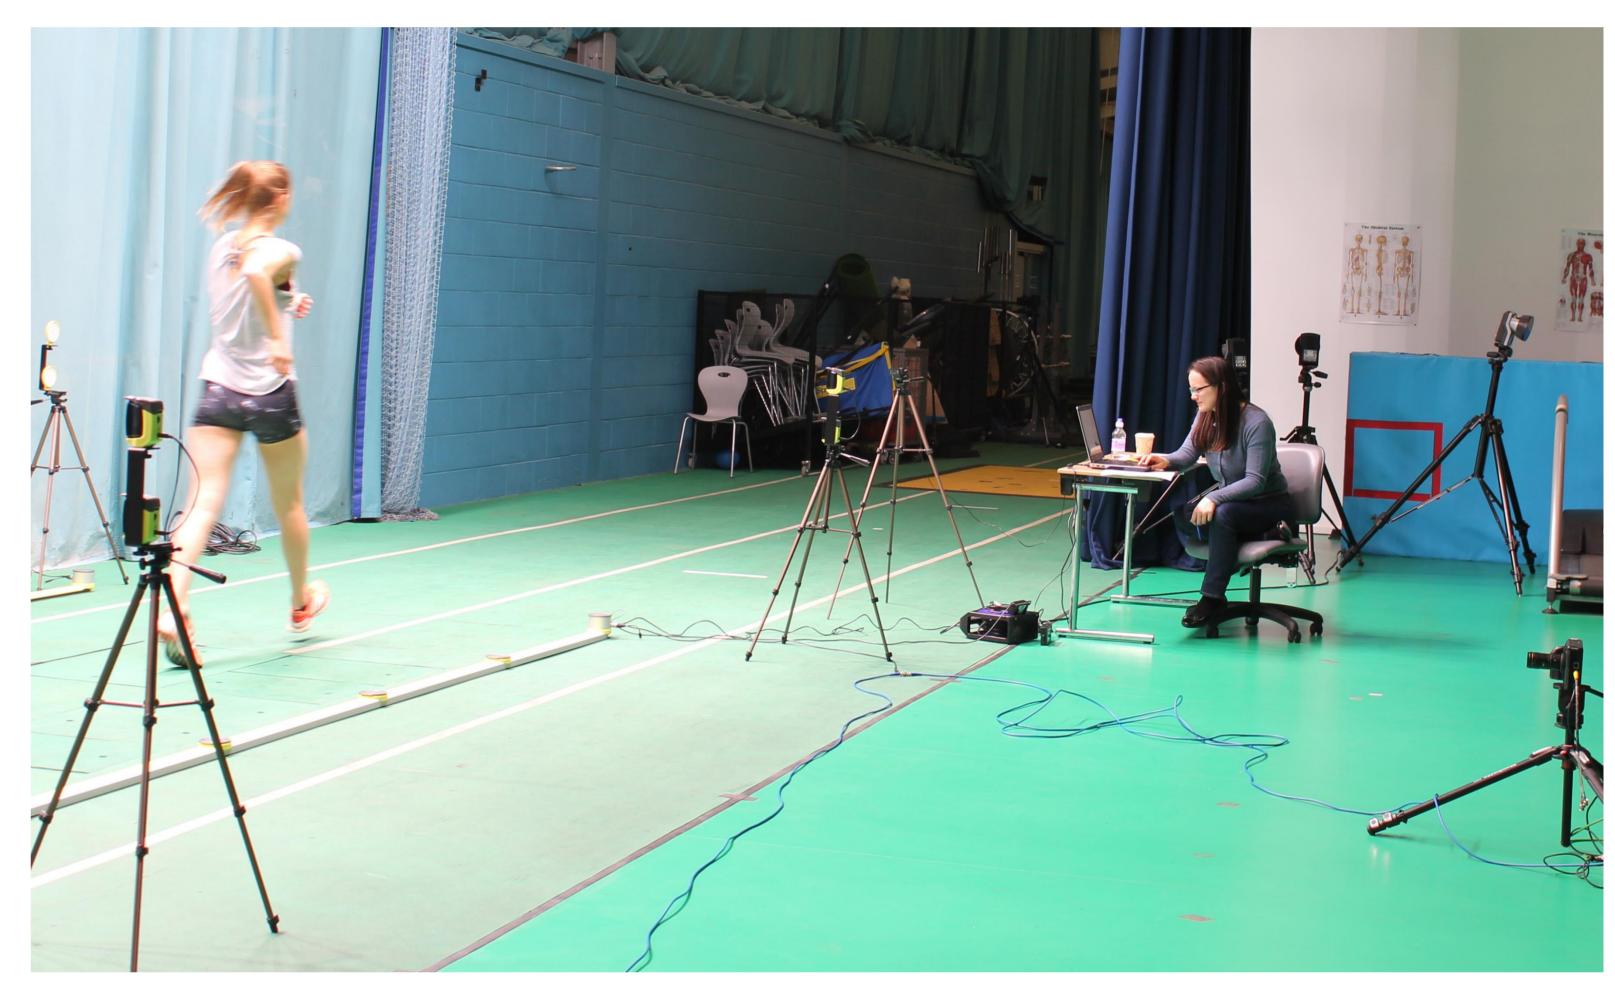

Results						
	Video	0_0	1_1	2_2	3_3	4_4
Contact						
ICC	.991	.967	.982	.995	.960	.874
95% CI	.952996	.066992	.566995	.993996	.400988	071969
LOA bias (s)	.004	011	008	.000	.011	.024
LOARE (s)	.010	.010	.010	.010	.015	.015
Flight						
ICC	.973	.841	.902	.983	.843	.558
95% CI	.839990	121953	.296967	.977988	103953	125850
LOA bias (s)	004	.012	.008	.000	011	023
LOARE (s)	.008	.014	.013	.008	.014	.018

Discussion

The OptoJump Next system provided results similar to those of the gold standard force plates, with the 2_2 setting the most reliable. Users of the OptoJump Next system should therefore note that adjusting the settings of the device (from 0_0, the most likely default setting) might be necessary to achieve the most accurate results. The high-speed video recordings also provided very good reliability although the time-consuming nature of video analysis means the OptoJump Next system is better suited to providing immediate results.